ISU® 90IEO WRSK 3-DOOR

Internal Airlift/ Helicopter Slingable Container Unit (ISU®)

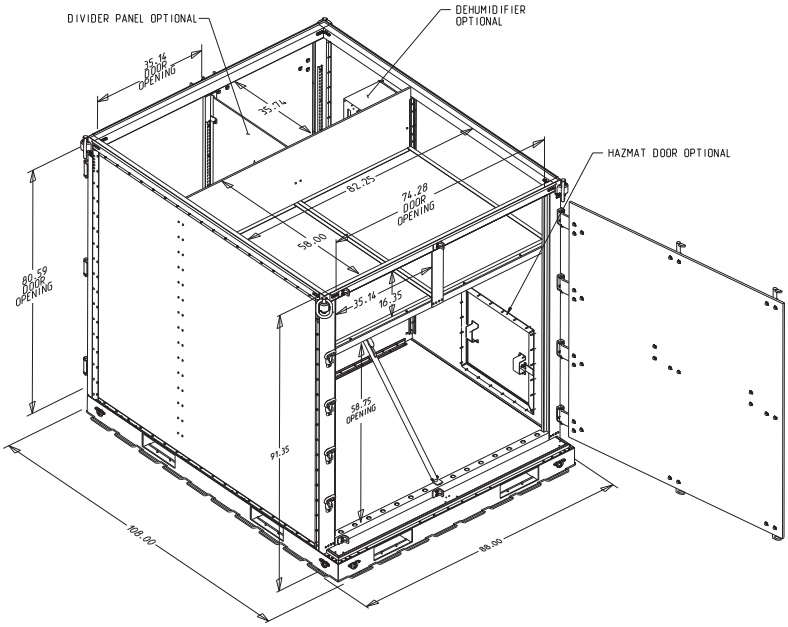

One example of an ISU® container configuration (ISU®s can be customized to meet your specifications)

P/N	NSN	COLOR	GSA	DLA
*56176-000	8145-01-465-4164	GREEN	•	•
*56276-000	8145-01-465-4569	TAN	•	
*56376-000	8145-01-465-4810	BLACK	•	•
*56476-000	8145-01-465-4887	GRAY	•	
DIMENSIONS				
EXTERIOR	88"W X 108"L X 91.35"H			
INTERIOR	385 cu.ft.			
WEIGHT	PAYLOAD CAPACITY	MAXIMUM GROSS WEIGHT		
1,700 lbs.	10,000 lbs.	11,700 lbs.		

*Above part numbers are for containers only; no accessories

- See Military Certifications starting on page 2.1.4
- See Optional Kits starting on page 2.5.1
- See Optional Accessories starting on page 2.6.1

For more information or for a single part number for a customized ISU® Container, call 800-355-2015

Wheel Restraint Security Kit (WRSK) Container

FEATURES

- Three doors; one door on one 88” side for tire rack with permanent shelf, two doors on opposite 88” side with adjustable shelves
- Equipped with aisleway for ease of loading on aircraft
- Front door has dual lock rods
- C-130 wheel well access aisle on 88” end
- Container holds four (4) C-130 main gear tires that position in ISU through large door (tires extend beyond center line), center wall is moved
- Four-way forkliftable
- Intermodal - transportable by air, land, sea or rail
- Stackable two-high when loaded with up to 10,000 lbs. or empty
- Compatible with standard military transport vehicles/ equipment 2.5-ton and 5-ton - FMTV, LMTV, HEMTT, Flatrack, CROP, etc.
- Base pre-drilled for optional caster set
- Ready for use with low or high-speed mobility wheel set
- All aluminum extruded, mechanically fastened pallet base certified not to damage aircraft roller systems
- Winching rings located at every lower corner
- Retractable folding steps for easy roof access for sling hookup

AAR 201 Haynes Street • Cadillac, MI 49601 • 800.355.2015 • mobility.systems@aarcorp.com • www.aarmobilitysystems.com • ©2018 AAR CORP. All rights reserved.